

TEREX STINGER™ 3470 Boom Truck Crane

THE STATE OF THE S

FEATURES

- 34,000 lbs. (15 422 kg) maximum lifting capacity
- 80 ft. (24.4 m) maximum sheave height
- 120 ft. (36.6 m) maximum sheave height with 40 ft. (12.2 m) jib
- 70 ft. (21.3 m) fully proportional threesection telescopic "keel" boom
- Exclusive color coded boom and load charts
- Easy-to-install optional 24-40 ft.

- (7.3-12.2 m) jib, man baskets or work platform increase job capabilities
- Choice of two configurations behind cab with either 180° or 360° work area and rear mount
- Electronic Load Moment Indicator and anti-two-block device standard
- 2-speed planetary winch has 11,400 lb. (5171 kg) maximum line pull, 150/220 fpm (46/67 mpm) line speed
- · Externally located planetary rotation drive

for easy accessibility for maintenance

- Dual control stations with direct mechanically controlled hydraulic system
- 67 gal. (340 I) capacity hydraulic tank
- Terex Support Plus product service

simple, available and cost effective™

Machines shown may have optional equipment.

Load Ratings (Pounds) for 360° Full Capacity Work Area with **Outriggers Extended and Optional Front Stabilizer**

| | | BOOM LENGTH | | | | | | | | | | |
|-----------------------------|--|--|----------------------------------|------------------------|----------------------------------|------------------------|----------------------------------|------------------------|----------------------------------|------------------------|----------------------------------|------------------------|
| 27 FT 34 FT | | FT | 43 FT | | 52 FT | | 61 FT | | 70 FT | | | |
| OPERATING RADIUS (FT) | LOADED BOOM ANGLE (DEG) | LOAD RATING (LB) | LOADED BOOM ANGLE (DEG) | LOAD RATING (LB) | LOADED BOOM ANGLE (DEG) | LOAD RATING (LB) | LOADED BOOM ANGLE (DEG) | LOAD RATING (LB) | LOADED BOOM ANGLE (DEG) | LOAD RATING (LB) | LOADED BOOM ANGLE (DEG) | LOAD RATING (LB) |
| 5 | 77 | 34,000 | | | | | | | | | | |
| 10 | 66 | 21,100 | 71 | 17,100 | 75 | 16,000 | 78 | 15,700 | | | | |
| 15 | 54 | 15,100 | 62 | 14,000 | 68 | 12,100 | 72 | 11,100 | 75 | 10,800 | 77 | 9,600 |
| 20 | 39 | 11,100 | 51 | 10,100 | 61 | 9,100 | 66 | 8,600 | 71 | 8,200 | 73 | 7,300 |
| 25 | 17 | 7,900 | 40 | 7,700 | 53 | 7,100 | 61 | 6,900 | 66 | 6,600 | 69 | 5,900 |
| 30 | | | 23 | 6,500 | 44 | 6,100 | 54 | 5,600 | 60 | 5,300 | 64 | 4,900 |
| 35 | | | | | 33 | 4,800 | 47 | 4,700 | 54 | 4,600 | 60 | 4,150 |
| 40 | | | | | 16 | 3,500 | 38 | 4,100 | 48 | 3,900 | 55 | 3,550 |
| 45 | | | | | _ | | 27 | 3,250 | 41 | 3,200 | 49 | 3,050 |
| 50 | NOTE: RATINGS ABOVE THE HEAVY LINE ARE | | | | | 9 | 2,950 | 33 | 2,800 | 44 | 2,650 | |
| 55 | | BASED ON STRUCTURAL COMPETENCE AND NOT ON MACHINE STABILITY. | | | | | | | 23 | 2,500 | 37 | 2,350 |
| 60 | | | | | | | | | | | 29 | 1,900 |
| 65 | | | | | | | | | | | 19 | 1,700 |

| | | | NOT | | |
|-----|-------|------|------|----|---|
| | IN | THIS | AR | EA | |
| | | | T FR | | |
| | / [| DEPL | OYE |). | |
| 1 | | V | 7 | | 1 |
| 1 | | | | | į |
| € 1 | ОТАТЮ | NC. | A | | 7 |
| 1 | | | | 1 | / |
| 1 | | _ | | 1 | / |
| | - | - | _ | | |
| | | | | | |

| Deductions from Rated Loads for Handling Devices | | | | | |
|--|----------|--|--|--|--|
| OVERHAUL BALL: | 125 lbs. | | | | |
| 1 SHEAVE LOAD BLOCK: | 200 lbs. | | | | |
| 2 SHEAVE LOAD BLOCK: | 230 lbs. | | | | |
| AUXILIARY SHEAVE: | 50 lbs. | | | | |

130

| Stowed Jib | Deductions | (Pounds) |
|------------|------------|----------|
|------------|------------|----------|

| 450 | 260 | 000 | 000 | 000 | 475 |
|-----|-----|-----|-----|-----|-----|
| 450 | 300 | 200 | 230 | 200 | 1/5 |

| | | JIB CA | PACITIE | S FOR A | LL BOC | M LENG | THS | | | |
|----------------------|-----------|-----------|----------|----------|-----------|-----------|------------|----------|------|------|
| VER | IFY OPERA | ATIONAL N | ODE SETT | ING ON M | G585 DISF | PLAY BEFO | RE LIFTING | WITH JIE | 3 | |
| Loaded Boom Angle | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° |
| Retracted 24 ft. Jib | 700 | 825 | 1000 | 1150 | 1340 | 1600 | 1900 | 2300 | 3100 | 4160 |
| Extended 40 ft. Jib | 520 | 580 | 650 | 730 | 810 | 930 | 1080 | 1400 | 1810 | 2260 |

General Notes

- 1. The operator must read and understand the Owner's Manual before operating this crane
- 2. Positioning or operation of crane beyond areas shown on this chart is not intended or approved except where specified in Owner's Manual
- 3 Loaded boom angles at specified boom lengths give only an approximation of the operating radius. The boom angle before loading should be greater to account for deflections. Do not exceed the operating radius for rated loads.
- 4. Use rating of next longer boom for boom lengths not shown. Use rating of next greater radius for load radii not shown
- 5. Boom must be fully retracted when jib is erected before lowering below minimum angle. Retracted jib has no lifting capacity below a 50° boom angle.
- 6. Use rating of next lower boom angle for boom angles not shown on jib load rating chart.
- 7. Lifting off the main boom point while the swing around jib is erected is not intended or approved.
- 8. Do not lower boom into this area, as hydraulic pressure will not allow raising the boom without retracting boom first.
- 9. Crane load ratings on outriggers are based on freely suspended loads with the machine leveled and standing on a firm uniform supporting surface. No attempt shall be made to move a load horizontally on the ground in any direction

- 10. Practical working loads depend on supporting surface, wind and other factors affecting stability such as hazardous surroundings experience of personnel, and proper handling must all be taken into account by the operator.
- 11. The maximum load which may be telescoped is limited by hydraulic pressure, boom angle and boom lubrication. It is safe to attempt to telescope any load within the limits of the load rating chart.


INFORMATION

- 1. Deductions must be made from rated loads for stowed jib, optional attachments, hooks and loadblocks (see deduction chart). Weights of slings and other load handling devices shall be considered a part of the load.
- 2. Crane load ratings with outriggers are based on outriggers and stabilizers extended and set with all load removed from the carrier wheels.
- 3. Load ratings do not exceed 85% of tipping load.

DEFINITIONS

- 1. Operating radius is the horizontal distance from the axis of rotation to the center of the vertical hoist line or load hook with load suspended.
- 2. Loaded boom angle as shown in the Load Ratings Chart is the included angle between the horizontal and longitudinal axes of the boom base after lifting rated load at rated radius

Range Diagram (27' - 70' boom)

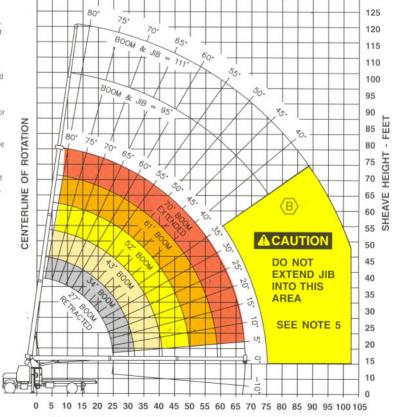

OPERATING RADIUS FROM CENTERLINE OF ROTATION - FEET

| | | 1 Part Line | 2 Part Line | 3 Part Line | 4 Part Line |
|------------|--------------------|---------------|-----------------------|---------------------------------|--|
| | | OVERHAUL BALL | ONE SHEAVE LOAD BLOCK | AUX BLOCK ONE SHEAVE LOAD BLOCK | AUX BLOCK TWO SHEAVE LOAD BLOCK |
| Winch | Cable | Lift and | Lift and | Lift and | Lift and |
| | Supplied | Speed | Speed | Speed | Speed |
| Standard | 9/16" Diam. | 9,600 lb. | 19,200 lb. | 28,800 lb. | 34,000 lb. |
| Stationary | IWRC XXIP | 94 fpm* | 47 fpm* | 32 fpm* | 24 fpm* |
| Winch | 9/16" Diam. | 6,720 lb. | 13,440 lb. | 20,160 lb. | 26,880 lb. |
| | Rotation Resistant | 94 fpm* | 47 fpm* | 32 fpm* | 24 fpm* |

^{*}First layer speed. For fourth layer speed, multiply *value by 1.33, for burst speed, multiply by 1.7.

| Block Type | Rating |
|----------------|------------------|
| Overhaul Ball | 6.5 ton (5.9 mt) |
| 1 Sheave Block | 17 ton (15.4 mt) |




CAUTION

Overload and anti-two-block systems must be in good operating condition before operating crane. Refer to Owners Manual.

Keep at least 3 wraps of loadline on drum at all times.


Use only $9/16\ensuremath{^{\circ}}$ diameter cable with 33,600 lb. breaking strength on this machine.

MOUNTING CONFIGURATIONS

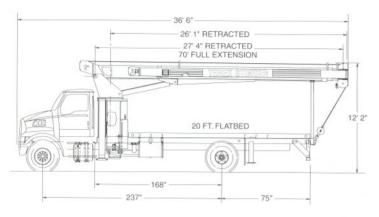

3470 Behind Cab (BT) Mounting Configuration

| Gross Vehicle Weight Rating | 33,000 lbs. (14 969 kg) |
|---|---|
| Front Axle Weight Rating | |
| Rear Axle Weight Rating | |
| Wheelbase | |
| Cab to Axle | 168 in. (4267 mm) |
| Afterframe | 75 in. (1905 mm) |
| Transmission(Neutral lock-up required for automatic transmission) | |
| Electrical System | |
| Cooling System | Heavy-Duty |
| Frame Section Modulus | 15.9 in ³ (261 cm ³) |
| RBM Per Frame Rail1 | ,400,000 in. lb. (16 130 m. kg) |

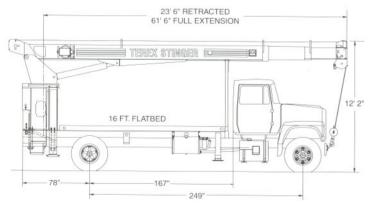

3470 Rear Mount (RM) Mounting Configuration**

| II . |
|---|
| 33,000 lbs. (14 969 kg) |
| 12,000 lbs. (5443 kg) |
| 21,000 lbs. (9526 kg) |
| 249 in. (6325 mm) |
| 167 in. (4242 mm) |
| 78 in. (1981 mm) |
| Heavy-Duty |
| Heavy-Duty |
| Heavy-Duty |
| 20.0 in ³ (328 cm ³) |
| 0,000 in. lb. (20 740 m. kg) |
| |

^{**}May require counterweight or tandem rear axle. Consult factory.

Note: Some standard features for the optional mounting configurations will vary. Consult your Terex Cranes dealer or factory for chassis and mounting requirements.

TEREX STINGER 3470

Boom Truck Crane

SPECIFICATIONS

Boom

70 ft. (21.3 m) three section full power mechanically synchronized boom. Patented keel boom design utilizes a keel-shaped baseplate combined with a deep, four plate boom section to optimize strength / rigidity-to-weight ratio. Exclusive, patented color-coded boom and load charts allow the operator to easily and quickly determine boom extension, boom angle and load capacity. Maximum sheave height with three section 70 ft. (21.3 m) boom is 80 ft. (24.4 m). Maximum sheave height with optional two-stage 40 ft. (12.2 m) jib is 120 ft. (36.6 m).

Winch


Hydraulic winch with gear motor and planetary reduction gearing provides 2-speed operation. First layer rope pull is 11,400 lbs. (5171 kg). Wire rope size is 9/16" (14 mm) with 33,600 lbs. (15 241 kg) breaking strength.

Operating Speeds

Main frame / turret assembly planetary rotation provides 180° rotation (370° with optional front bumper outrigger). Swing rotation is 40 seconds. Boom up/down is 22/22 seconds and boom extend/retract is 50/22 seconds

Hydraulics

Three section pump allows the operator to perform simultaneous crane operations (winch, boom and swing). Capacities are 36, 20 and 11 gpm (136.3, 75.7 and 41.6 lpm). Combined system capacity is 67 gpm (253.6 lpm).



Controls

Fully proportional, excellent metering characteristics for precise boom movements. Independent outrigger controls allows the crane to be stable and level in rigorous working conditions. Load Moment Indicating System has audio alarm and functional shut down when operator encounters an overload situation.

Outriggers

Wide-stance link-type main outriggers have a 18 ft. 6 in. (5.6 m) pin-to-pin spread when fully extended. A-Frame rear outriggers have 10 ft. 1 in. (3 m) tip-to-tip span.

Subframe

Single fabricated, closed-box style subframe yields greater strength and rigidity. Wheel base for standard truck crane mounting configuration is 237 in. (6 m).

OPTIONS AND ACCESSORIES

Terex Stinger offers a wide range of options and accessories to customize your truck crane to your exact needs.

These include:

- · Single and two-stage jibs
- · Multi-part load blocks
- · Auxiliary winch
- Spin-resistant load line
- · Wood, steel or extra heavy duty steel flatbeds
- · Radio remote controls
- · One-man or two-man baskets
- · Self-leveling work platform with radio remote

- · Winch drum tensioner
- · Continuous rotation
- · Oil cooler
- · Rear bumper
- Single front bumper outrigger (required for 370° or continuous rotation)
- Hydraulic hose reel
- · Hydraulic auxiliary tool circuit

For more information, product demonstration, or details on purchase, lease and rental plans, please contact your local Terex Cranes dealer.

We reserve the right to amend these specifications at any time without notice. The only warranty applicable is our standard written warranty applicable to the particular product and sale. We make no other warranty, expressed or implied.



550 Old Highway 56 Olathe, KS 66061-4640 USA (913) 782-1200 • FAX: (913) 782-1625 E-mail: inquire@terexlifting.com

