


4ft x 20ft Crane Mat

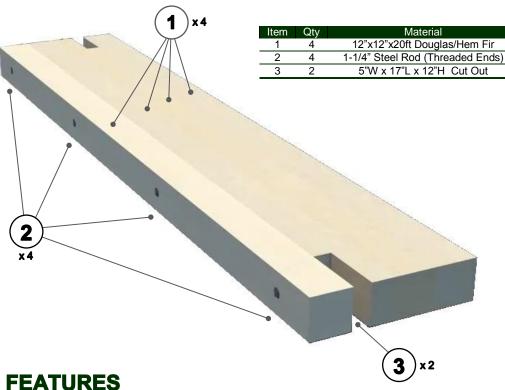

<u> </u>
Specifications
4ftW x 20ftL x 12"H
2,500 lbs per Mat
20 Mats per Tri-Axle
600,000 lbs Load Capacity
 Highest Quailty Douglas/Hem Fir
 1-1/4" Steel Rod (not 1" as others)
Countersunk Washers/Nuts
 Narrow Cut Lifting Lug (not 18ft Timber)
Same Price

Long Beam, 20ft

Mat Tie Rods cw Nut & Washer

Lifting Lug



Dimensional Timber

- Dimensional Timber for Flat Working Surface Safer, Tight Laydown And Smooth Travel
- 4 Tight Tolerance 20ft Members (not 2x20 2x18 Uneven)
- 1-1/4" Steel Rod, Heavy Washer, Bolted & Tacked
- Longer Life and Best Performance
 Douglas Fir With Highest Compressive Strength
 Bolted Steel Rods Hold Tight Longer On Doug/Hem Fir
- Rental or Sale



APPLICATIONS

- CRANE PADS
- PIPELINE CROSSINGS
- HEAVY INDUSTRIAL ROAD ACCESS
- SPMT TRANSPORT
- OVER-THE-ROAD TRANSPORT
- BURIED BASE
- All HEAVY INDUSTRIAL APPLICATIONS

CONSTRUCTION

- Tight Tolerance Cut Douglas/Hem Fir Highest Possible Compressive Strength
- Larger Diameter Rod (1-1/4") Bolted And Tacked

 Torqued To Compressive Strength To Stay Tight
- Tight Cut Lifting Lug For Balanced Handling Safer Handling And Less Tripping Hazard
- Serial Numbered For Inventory Control

VE APPRECIATE THE OPPORTUNITY TO EARN YOUR BUSINESS

1)866.960.9255

terry@myshaksales.com www.myshakgroup.com